



Project \_\_\_\_\_  
 Item \_\_\_\_\_  
 Quantity \_\_\_\_\_  
 CSI Section 11400 \_\_\_\_\_  
 Approval \_\_\_\_\_  
 Date \_\_\_\_\_

# Shortening Disposal Units

Shortening Disposal Units

## Models

PSDU50

PSDU100



PSDU50

### Standard Features

- 9-5/8" (24.5 cm) drain height (with cover open) allows unit to fit under most frypots to permit direct draining of oil into unit
- For non-filtered fryers, SDU is filled by use of a frypot drain extension
- Heavy-duty manual pump can empty 50 lbs. (25 liters) of oil in less than 60 seconds
- One-way check valve for easy priming of pump
- New high-strength 6" (15.3 cm) wheels provide easy transporting of oil, even across parking lots; and no lifting is necessary

### Options & Accessories

- 24" hose
- 48" hose

## Specifications

### **Specifically designed for safe and easy removal of waste oil from the kitchen**


Frymaster provides the answer for the transportation of waste oil from the kitchen to the disposal container, with shortening disposal units, available in 50-, and 100-lb. (25- and 50-liter) capacities.

The low center of gravity provides stability when transporting or operating the unit. The heavy-duty manual pump is located at a convenient height, and is easy to operate. A one-way check valve allows for easy priming of the pump.

There is no stooping, bending or lifting required to operate the unit. The oil tank has a tight-fitting cover and a secure latch to ensure safe transport without spills. Oil should be cooled to 120° F (49° C) or less for safe, trouble-free disposal.



PSDU100

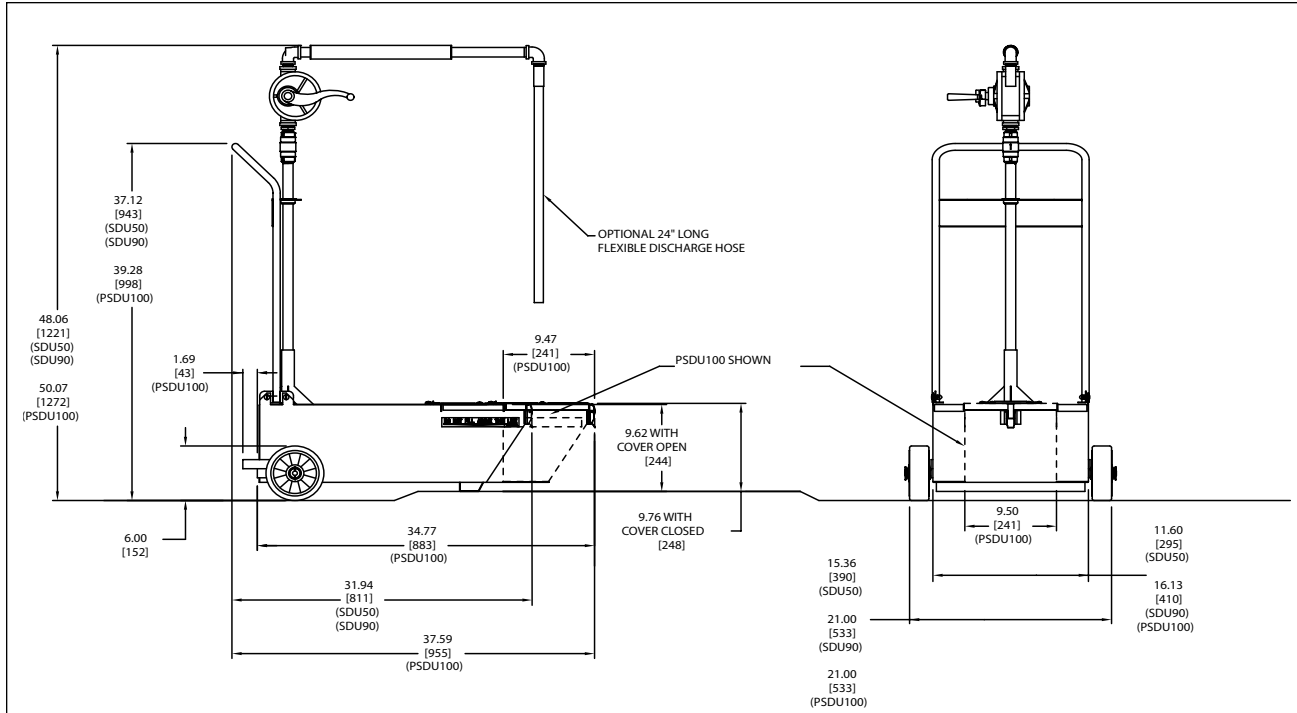

**DIMENSIONS**

| MODEL NO. | OIL CAPACITY (liters) | ASSEMBLED SIZE (cm) |   |               | DRAIN HEIGHT (cm)            | NET WEIGHT (kg) | SHIPPING INFORMATION |       |         | SHIPPING DIMENSIONS (cm) |            |             |
|-----------|-----------------------|---------------------|---|---------------|------------------------------|-----------------|----------------------|-------|---------|--------------------------|------------|-------------|
|           |                       | HEIGHT (cm)         | WIDTH (cm)  | LENGTH (cm)   |                              |                 | WEIGHT (kg)          | CLASS | CU. FT. | HEIGHT (cm)              | WIDTH (cm) | LENGTH (cm) |
| PSDU50    | 50 lbs. (25 liters)   | 48" (121.9)         | 15-3/8" (39.1)<br>Overall 11-5/8" (29.5)<br>Tank Only | 32" (81.3)    | 9-5/8" (24.5)<br>w/door open | 45 lbs. (20)    | 62 lbs. (28)         | 85    | 10      | 20" (50.8)               | 24" (61)   | 39" (99)    |
| PSDU100   | 100 lbs. (50 liters)  | 50" (127)           | 21 (53.3)<br>Overall 16-1/8 (41.0)<br>Tank Only       | 37-1/2 (95.3) | 9-5/8" (24.5)<br>w/door open | 63 lbs. (29)    | 80 lbs. (36)         | 85    | 10      | 20" (50.8)               | 24" (61)   | 39" (99)    |

SELECT SDU MODEL BY FILTER TYPE AND FRYER CAPACITY

| SDU Models | Frymaster Built-in Filtration | Dean Single Fryer Built-in Filtration |                          |                           | Dean Fryer Battery Built-in Filtration |                          |                           |
|------------|-------------------------------|---------------------------------------|--------------------------|---------------------------|--|--------------------------|---------------------------|
|            |                               | For Fryers Up to 50 lbs.              | For Fryers 50 to 85 lbs. | For Fryers 85 to 100 lbs. | For Fryers Up to 50 lbs.               | For Fryers 50 to 85 lbs. | For Fryers 85 to 100 lbs. |
| PSDU50     | Yes                           | No                                    | No                       | No                        | Yes                                    | No                       | No                        |
| PSDU100    | Yes                           | Yes                                   | Yes                      | Yes                       | Yes                                    | Yes                      | Yes                       |

**NOTE:**

**SDUs are for oil only. Do not run water or boil-out solution through the unit.**

Model # \_\_\_\_\_  
CSI Section 11400