



Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

GURP-S Undercounter/Worktable

GURP-S Undercounter/Worktable

Coolsapes™ Undercounter/Worktable refrigerator with S/S doors

Models

- GUR24P-S Undercounter/Worktable Refrigerator, 24" L x 31.5" D x 36" H, S/S Door
- GUR27P-S Undercounter/Worktable Refrigerator, 27" L x 31.5" D x 36" H, S/S Door
- GUR32P-S Undercounter/Worktable Refrigerator, 32" L x 31.5" D x 36" H, S/S Door
- GUR48P-S Undercounter/Worktable Refrigerator, 48" L x 31.5" D x 36" H, S/S Door
- GUR60P-S Undercounter/Worktable Refrigerator, 60" L x 31.5" D x 36" H, S/S Door
- GUR72P-S Undercounter/Worktable Refrigerator, 72" L x 31.5" D x 36" H, S/S Door



GUR72P-S

Standard Features

- Durable, rugged stainless steel top and front
- Smart door hinge that auto closes up to 90 degrees and stays open past 90 degrees. 180 degree door opening
- Environmentally friendly R290 refrigerant
- High density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane keeps energy costs low
- Integral door/drawer handle
- 5" (two locking, two non-locking) casters shipped loose for field installation
- 8' cord and plug supplied
- Gray epoxy coated shelves (2 per section) with stainless steel pilaster and shelf clips
- Electronic temperature control
- Energy-efficient door gasket removable without tools
- Field rehingable doors
- Three year parts and labor warranty and an additional two year compressor parts warranty

Options & Accessories

- Cutting boards (composite or poly)
- 18" wide single or double tier overshef
- Stainless steel finish on back
- Laminate
- Additional shelves
- Door lock (door models only)
- Exterior thermometer
- Energy-saving LED interior light
- Lower height casters
- 6" black legs
- 6" flanged feet
- Stacking collar
- 18-gauge heavy duty top
- Condenser filter
- Glass doors
- Drawers
- Stainless steel ends
- On/Off master switch

Specifications

Exterior top is one-piece, stainless steel with integral 2.12" (5.4cm) square nosing on the front.

Exterior back and bottom is galvanized steel. Exterior ends are mill finish aluminum.

Interior sides are gray coated aluminum. Interior bottoms are anodized aluminum. Base is fully insulated with high-density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane.

Refrigeration system uses R290 refrigerant. Compressor is 1/5 H.P., with condenser coil and hot gas condensate evaporator mounted on rear of the cabinet. Evaporator coil is located on the interior rear wall of the cabinet. Refrigerant flow is controlled by a capillary tube. Cabinet maintains an interior cabinet temperature of 33°F to 40°F (2°C to 4°C).

System is controlled using an electronic temperature control which provides improved pull-down times, reducing compressor cycling and longer compressor life with lower energy consumption. Control system uses adaptive defrost to assure evaporator coil is free of ice and operating at optimum efficiency. Evaporator condensate is eliminated using an energy-efficient hot gas system.

Digital exterior temperature display is located on the back of the cabinet.

Electrical connection is 115 volt, 60 Hertz, single phase. Unit has a 8' (2.4m) long electrical cord and NEMA 5-15P plug.


Casters: 5" (13cm) diameter plate casters shipped loose with front two locking. Equipment clearance above the floor is 2.5" (6cm).

Door has a stainless steel exterior, with thermoformed ABS plastic interior liner.




GURP-S Undercounter/Worktable


Undercounter/Worktable refrigerator with S/S doors

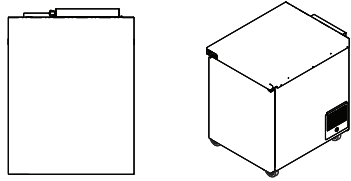


GUR24P-S, GUR27P-S, GUR32P-S

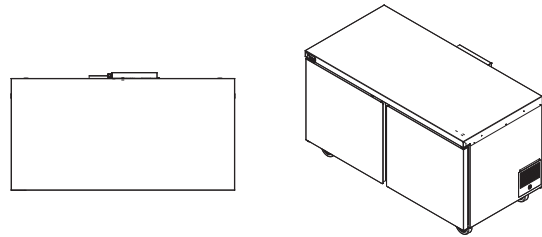

GUR48P-S, GUR60P-S

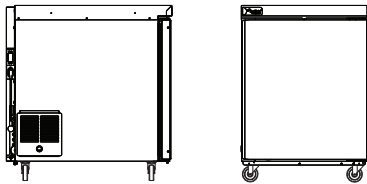

GUR72P-S

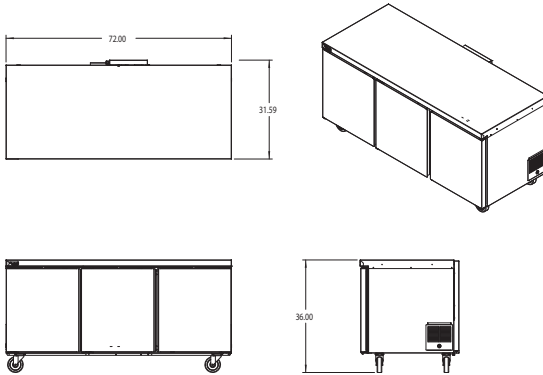

UNIT DIMENSIONS

UNIT	LENGTH	DEPTH	2"	3"	5"
			CASTER HEIGHT	CASTER HEIGHT	CASTER HEIGHT
			Optional		Standard
24	24"	31.59"	31.88"	33.88"	36"
27	27"	31.59"	31.88"	33.88"	36"
32	32"	31.59"	31.88"	33.88"	36"
48	48"	31.59"	31.88"	33.88"	36"
60	60"	31.59"	31.88"	33.88"	36"
72	72"	31.59"	31.88"	33.88"	36"

Specifications								
Model	HP	V	Hz	A	Nema Plug	Vol (ft3)	Energy kWh	Ship Weight
GUR24P-S	1/5	115	60	3.2	5-15p	4.1	1.1417	140 lbs. (64kg)
GUR27P-S	1/5	115	60	3.2	5-15p	4.8	1.1228	145 lbs. (66kg)
GUR32P-S	1/5	115	60	3.2	5-15p	5.8	1.1920	161 lbs. (73kg)
GUR48P-S	1/5	115	60	3.2	5-15p	9.2	1.6305	207 lbs. (94kg)
GUR60P-S	1/5	115	60	3.2	5-15p	11.7	1.8239	234 lbs. (106kg)
GUR72P-S	1/5	115	60	3.2	5-15p	14.2	1.9609	263 lbs. (119kg)

Delfield reserves the right to make changes to the design or specifications without prior notice.